

HDMI / HDMI - V1.4 ADAPTOR



HDMI & USB FACE PLATE



MATERIAL

Coupler Housing : ABS High-Impact UL94V-0 Thermoplastic
 Contact : 3U" Gold-Plated.
 Color : White
 RoHS Compliant

PHYSICAL CHARACTERISTICS

Durability Matingcycle : 1000 Cycles Min.
 Insertion Force : 4.5Kgf Max.
 Withdraw Force : 0.5Kgf-4Kgf.
 Operation Temperature :-55°C to 85°C.

ELECTRICAL


Contact Current Rating : 0.5A Min.
 Voltage Rating : 40V AC(RMS)
 Insulation Resistance : 100M ohms Min.
 Contact Resistance : 2 Ohm Max.
 Dielectric With Standing Voltage : 300V. AC.

MATERIAL

Housing : White ABS High-Impact
 UL94V-0 Thermoplastic

PHYSICAL CHARACTERISTICS

Durability : EIA 364-09 , 1500 Cycles.
 Dimension : 45X45 mm.

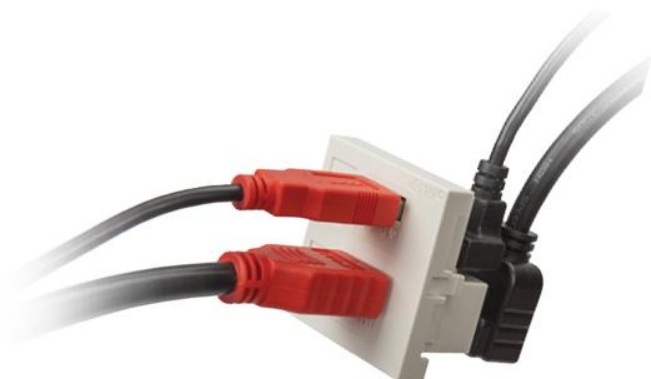

2 PORT HDMI&USB 2.0
FACE PLATE



2 PORT HDMI&USB 3.0
FACE PLATE

Art No	Product Description
FO-AD-HDMI	22,5 X 45 HDMI Adaptor

Art No	Product Description
FO-FW04-2E-WH	45x45 2 Port HDMI&USB Face Plate (Unloaded)
FO-FW04-2L-WH2	45x45 2 Port HDMI&USB 2.0 Face Plate (Full Loaded)
FO-FW04-2L-WH3	45x45 2 Port HDMI&USB 3.0 Face Plate (Full Loaded)

