


OPTICAL DISTRIBUTION BOXES

PLASTIC ODB BOXES

4/8 PORT WALLMOUNT TYPE

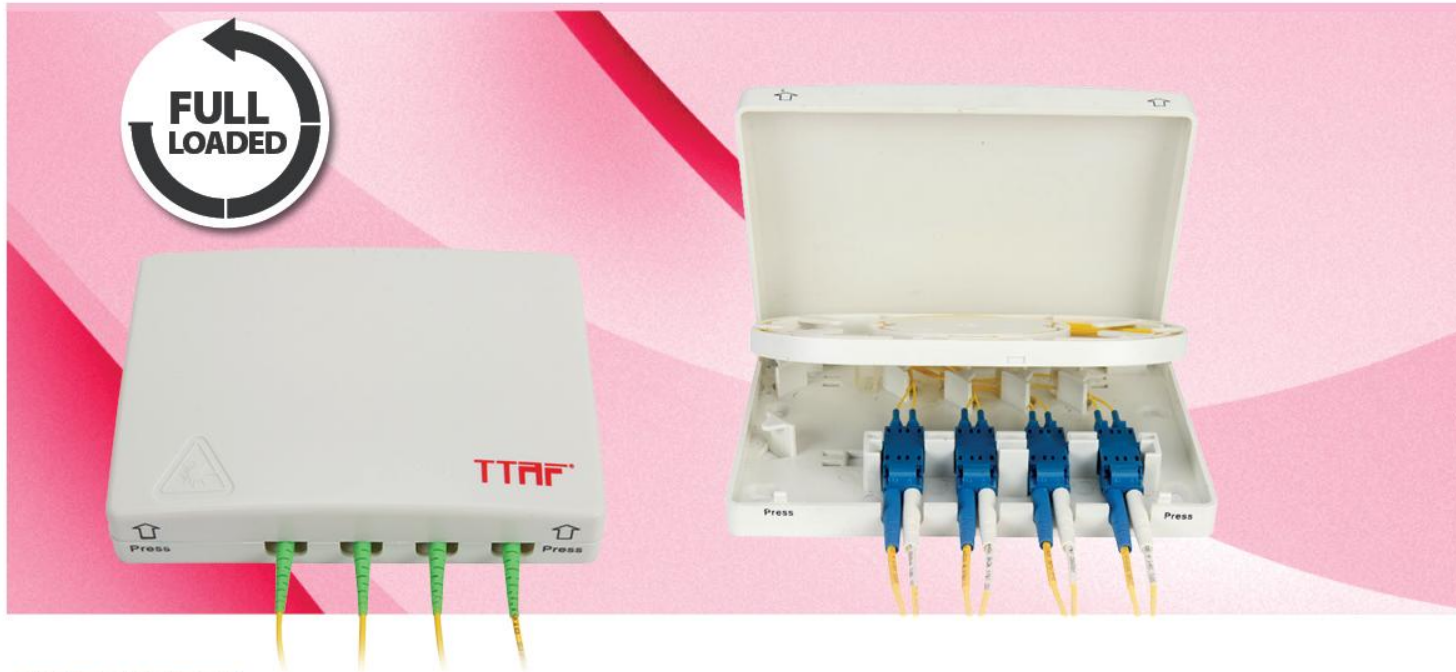

OVERVIEW

It is designed indoor use by TTAF, It has ideal flexibility for fiber to the desk applications. It seems as a phone box so, it never disturbs you inside of the house.

Features

APPLICATIONS

- » Optical Networks
- » In house applications
- » Fiber to the desk.

CONNECTIONS

- » Termination count 4 SC Simplex or 8 LC duplex.
- » Termination types are SC,LC per box.
- » Recommended patchable thickness 2-3mm



BENEFITS

- » Easy to reach patch in a field.
- » Separated splice area is protected at the upper position.
- » In order to facilitate the installation routing the cable is simplified.
- » Slim splice cassette and mini splice protector provides easy termination advantages.

SPECIFICATIONS

Dimensions	140mm (w) X 110mm (H) X 26mm (D)
Weight	Approx. 100g.
Mounting	On wall
Material	ABS
Operating Temperature	-40° to 60° C
Operating Humidity	0 to 90%
IP rating	IP53
Vibration	10~55~10Hz / 10 Min in 2 Hours

- » Minimum bending radius is 30mm throughout box laser radiation protection. Adapter location prevents exposure.