


UL 94 V-0 Low Ins. loss High quality LS ZH



### CONNECTOR SPECIFICATIONS

	CONNECTOR A	CONNECTOR B
• Insertion Loss	≤ 0.2 dB	≥ 0.2 dB
• Return Loss	55 dB	55 dB
• Endurance	1000 times.	1000 times.
• Other parameters meet standard	GR326	GR326

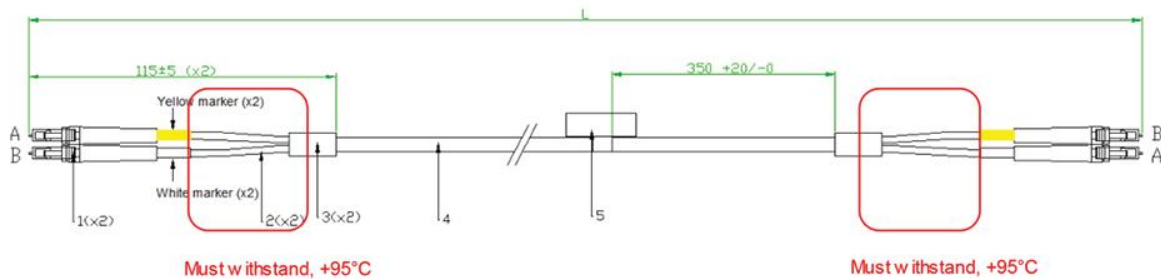

Art No

Product Description

FO-05554PPDX70XXX

DLC/DLC 9/125 SM DX 7mm. L: x meter Patchcord

FO-05254PPDX70XXX

DSC/DLC 9/125 SM DX 7mm. L: x meter Patchcord

FO-05224PPDX70XXX

DSC/DSC 9/125 SM DX 7mm. L: x meter Patchcord

