

UL 94 V-0 Low Ins. loss High quality LS ZH



CONNECTOR SPECIFICATIONS

	CONNECTOR A	CONNECTOR B
• Insertion Loss	≤ 0.3 dB	≥ 0.3 dB
• Return Loss	45 dB	45 dB
• Endurance	1000 times.	1000 times.
• Other parameters meet standard	GR326	GR326



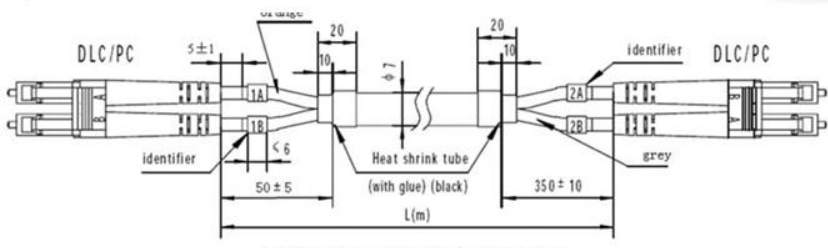


Figure Optical fiber Cable Assembly

Art No	Product Description
FO-05551PPDX70XXX	DLC/DLC 50/125 MM DX 7mm. L: x meter Patchcord
FO-05251PPDX70XXX	DSC/DLC 50/125 MM DX 7mm. L: x meter Patchcord
FO-05221PPDX70XXX	DSC/DSC 50/125 MM DX 7mm. L: x meter Patchcord

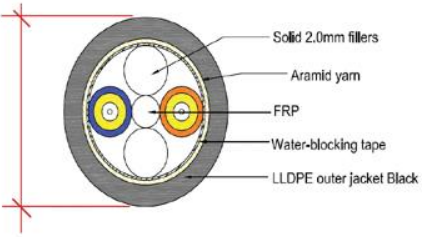