



LAN CABLES

S/FTP Cat7 DUAL

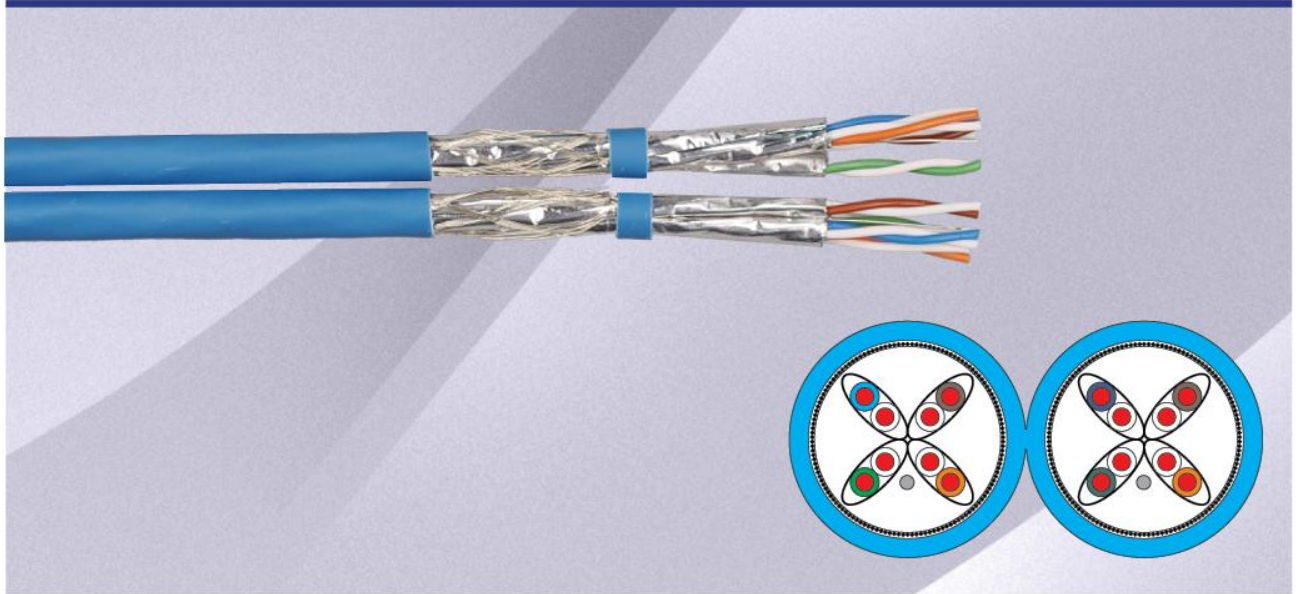

Transmission specifications

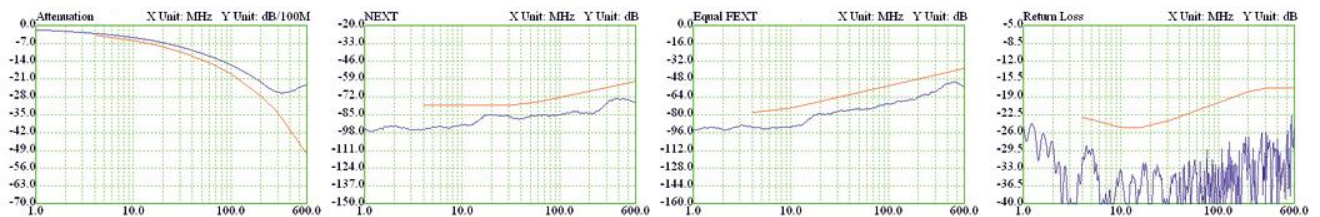

- » Temperature range(C °): -40 to 70
- » Velocity ratio(%): 80
- » Characteristic impedance:
 - » (From 1 to 100 MHz)100±15 Ohm
 - » (From 100 to 250 MHz)100±20 Ohm
 - » (From 250 to 600 MHz)100±25 Ohm
- » Bending radius (min.): 8 x cable diameter
- » Flame retardancy: CMP, CMR, CMG, CM
- » UL file number is E334179
- » It can be tested up to 1000 MHz

Construction

Conductor (dia.mm)	23 AWG SBC 0.57
Insulation (dia.mm)	Skin-Foam-Skin 1.32
Al-PET shielded	>=125%
Drain wire	TC 0.4
Braiding coverage(%)	TC 30% to 68%
Jacket (dia.mm)	PVC/LSZH 7.60 x 15.4
No. of pairs	8

STANDARDS AND PERFORMANCES

- » EN 50288-4-1
- » IEC 61156-5
- » EN 50173 Edition 2 – CLASS F
- » ISO 11801 Edition 2 – CLASS F

Art No

FO-LC7D-SFTPP

FO-LC7D-SFTPH

Product Description

S/FTP CAT7 Dual PVC Cable

S/FTP CAT7 Dual LSZH Cable

