UNIVERSAL CABLES
SINGLE LOOSE TUBE FIBER OPTIC CABLES
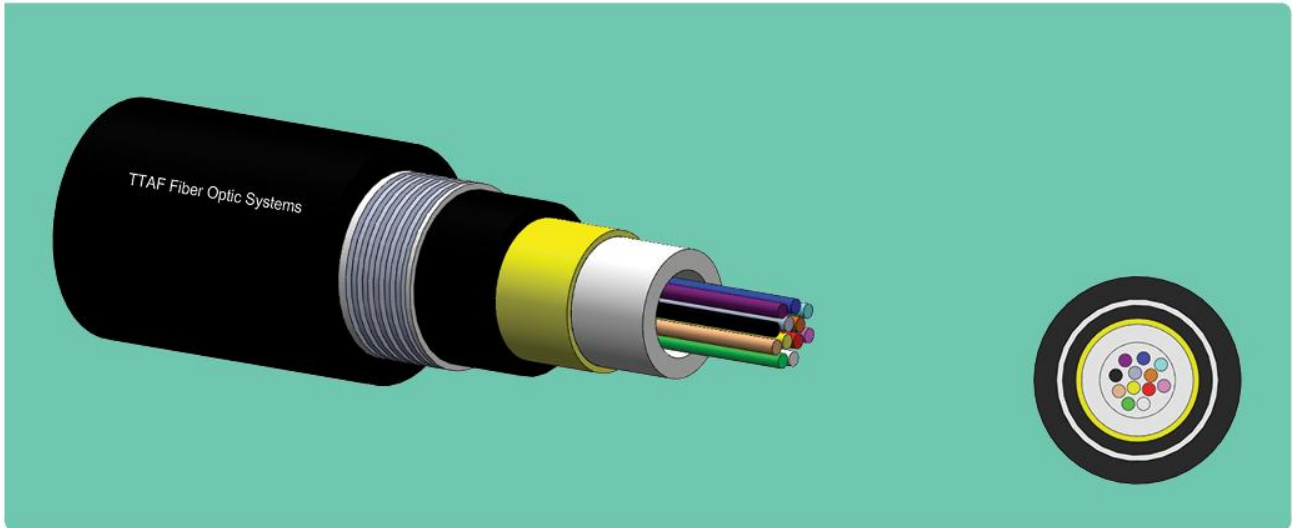
APPLICATIONS	FEATURES

» Cable is used for LAN applications need high transmission rate including voice, data and video.
» Single loose tube.

» Aramid yarn is applied around the buffer tube and jacketed. According to customer requirement, it can be produced armored or unarmored type.
» ITU-T G652D, G 652C , G653 , G655 SM fiber; 62.5/125 and 50/125 MM fiber.
» 2 - 12 fibers.

TTAF Code	Number of Fibers	Overall Dia (mm)	Cable Weight (kg/km)
FO-IK-DX-SM-2-Z	2	11	110
FO-IK-DX-SM-4-Z	4	11	110
FO-IK-DX-SM-6-Z	6	11	110
FO-IK-DX-SM-8-Z	8	11	110
FO-IK-DX-SM-10-Z	10	11	110
FO-IK-DX-SM-12-Z	12	11	110