

# PATCHPANELS




## FEATURES

- Up to 12 Fo connections
- Available to suit only adapter type
- You can apply ST/SC/FC/E2000/MU/MTRJ/LC
- Without rail
- Maintains fiber bending radius throughout for terminated optical fibers at 30mm
- Units can be custom design
- Compatible with screwed adapters and screwless type adapters
- Can be supplied with:
  - » Pigtail
  - » Special splice cassette
  - » Heat Shrink splice protectors



**Fiber Optic Splice Connecting Kit (12 Ports)**  
TTAF Code: FO-EA-12

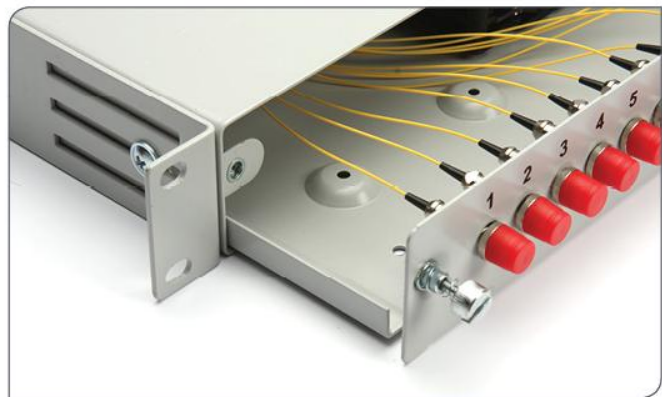

## TECHNICAL SPECIFICATIONS

Size (w:19"h:1U)	(w):485mm x (d): 225mm x (h):44.50mm
Weight	Approx 2,95 kg
Fiber Capacity	0-48 port
Adaptor Type	ST, FC, SC, LC, E2000, MTRJ, MU
Color	Ral9005 Black, Ral7035
Mounting	19" / 21" RackType
Material	Mild Steel